

Theory of Structures

Question No. 01

$P = 4\pi^2 EI/L^2$ is the equation of Euler's crippling load if

- (A) Both the ends are fixed
- (B) Both the ends are hinged
- (C) One end is fixed and other end is free
- (D) One end is fixed and other end is hinged

Answer: Option A

Question No. 02

Pick up the correct statement from the following:

- (A) The structural member subjected to compression and whose dimensions are small as compared to its length, is called a stmt
- (B) The vertical compression members are generally known as columns or stanchions
- (C) Deflection in lateral direction of a long column, is generally known as buckling
- (D) All the above

Answer: Option D

Question No. 03

For calculating the allowable stress of long columns $\sigma_0 = \sigma_y/n [1 - a (1/r)^2]$ is the empirical formula, known as

- (A) Straight line formula
- (B) Parabolic formula
- (C) Perry's formula
- (D) Rankine's formula

Answer: Option B

Question No. 04

Maximum principal stress theory for the failure of a material at elastic point, is known

- (A) Guest's or Tresca's theory
- (B) St. Venant's theory
- (C) Rankine's theory
- (D) Von Mises' theory

Answer: Option C

Question No. 05

Pick up the correct statement from the following:

- (A) The moment of inertia is calculated about the axis about which bending takes place
- (B) If tensile stress is less than axial stress, the section experiences compressive stress
- (C) If tensile stress is equal to axial stress, the section experiences compressive stress
- (D) All the above

Answer: Option D

Question No. 06

A composite beam is composed of two equal strips one of brass and other of steel. If the temperature is raised

- (A) Steel experiences tensile force
- (B) Brass experiences compressive force
- (C) Composite beam gets subjected to a couple
- (D) All the above

Answer: Option D

Question No. 07

A shaft subjected to a bending moment M and a torque T , experiences

- (A) Maximum bending stress = $32M/\pi d^3$
- (B) Maximum shear stress = $16 T/\pi d^3$
- (C) Both (a) and (b)
- (D) Neither (a) nor (b)

Answer: Option C

Question No. 08

A two hinged parabolic arch of span l and rise h carries a load varying from zero at the left end to ω per unit run at the right end. The horizontal thrust is

- (A) $\omega l^2/4h$
- (B) $\omega l^2/8h$
- (C) $\omega l^2/12h$
- (D) $\omega l^2/16h$

Answer: Option D

Question No. 09

The horizontal thrust on the ends of a two hinged semicircular arch of radius ' R ' carrying

- (A) A uniformly distributed load ω per unit run over its right half span, is $\frac{2}{3} \omega R/\pi$
- (B) A uniformly distributed load ω per unit run over its entire span is $\frac{4}{3} \omega R/\pi$
- (C) A distributed load varying from zero at the left end to ω per unit horizontal run at the right end, is $\frac{2}{3} \omega R/\pi$
- (D) All the above

Answer: Option D

Question No. 10

Maximum strain theory for the failure of a material at the elastic limit, is known as

- (A) Guest's or Trecas' theory
- (B) St. Venant's theory
- (C) Rankine's theory
- (D) Haig's theory

Answer: Option B

Question No. 11

Slenderness ratio of a long column, is

- (A) Area of cross-section divided by radius of gyration
- (B) Area of cross-section divided by least radius of gyration
- (C) Radius of gyration divided by area of cross-section
- (D) Length of column divided by least radius of gyration

Answer: Option D

Question No. 12

A close coil helical spring when subjected to a moment M having its axis along the axis of the helix

- (A) It is subjected to pure bending
- (B) Its mean diameter will decrease
- (C) Its number of coils will increase
- (D) All the above

Answer: Option A

Question No. 13

The ratio of the stresses produced by a suddenly applied load and by a gradually applied load on a bar, is

- (A) $1/4$
- (B) $1/2$
- (C) 1
- (D) 2

Answer: Option D

Question No. 14

Maximum shear stress theory for the failure of a material at the elastic limit, is known

- (A) Guest's or Tresca's theory
- (B) St. Venant's theory
- (C) Rankine's theory
- (D) Haig's theory

Answer: Option A

Question No. 15

A cantilever of length ' L ' is subjected to a bending moment ' M ' at its free end. If EI is the flexural rigidity of the section, the deflection of the free end, is

- (A) ML/EI
- (B) $ML/2EI$
- (C) $ML^2/2EI$
- (D) $ML^2/3EI$

Answer: Option D

Question No. 16

Pick up the correct statement from the following:

- (A) For channels, the shear centre does not coincide its centroid

- (B) The point of intersection of the bending axis with the cross section of the beam, is called shear centre
- (C) For I sections, the shear centre coincides with the centroid of the cross section of the beam
- (D) All the above

Answer: Option D

Question No. 17

Keeping breadth constant, depth of a cantilever of length ' l ' of uniform strength loaded with uniformly distributed load ' w ' varies from zero at the free end and

- (A) $2w/\sigma b \times l$ at the fixed end
- (B) $\sqrt{3w/\sigma b \times l}$ at the fixed end
- (C) $\sqrt{2w/\sigma b \times l}$ at the fixed end
- (D) $3w/\sigma d \times l$ at the fixed end

Answer: Option B

Question No. 18


If a three hinged parabolic arch, (span l , rise h) is carrying a uniformly distributed load w /unit length over the entire span,

- (A) Horizontal thrust is $wl^2/8h$
- (B) S.F. will be zero throughout
- (C) B.M. will be zero throughout
- (D) All the above

Answer: Option D

Question No. 19

The force in BC of the truss shown in the given figure, is

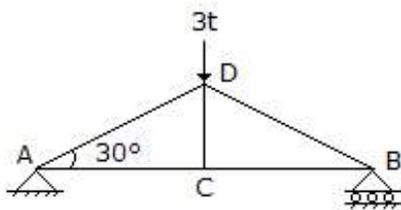

- (A) $3.0 t$ compression
- (B) $3.0 t$ tension
- (C) $(3\sqrt{3}/2) t$ tension
- (D) $(3\sqrt{3}/2) t$ compression

Answer: Option C

Question No. 20


$P = \pi^2 EI/L^2$ is the equation for Euler's crippling load if

- (A) Both the ends are fixed
- (B) Both the ends are hinged
- (C) One end is fixed and other end is free
- (D) One end is fixed and other end is hinged

Answer: Option B

Question No. 21

The degree of indeterminacy of the frame in the given figure, is

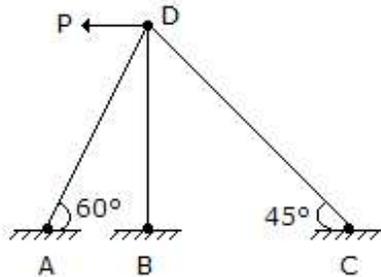

- (A) Zero
- (B) 1
- (C) 2
- (D) 3

Answer: Option B

Question No. 22

The forces in the members of simple trusses, may be analysed by

- (A) Graphical method
- (B) Method of joints
- (C) Method of sections
- (D) All the above

Answer: Option D

Question No. 23

A simply supported beam A carries a point load at its mid span. Another identical beam B carries the same load but uniformly distributed over the entire span. The ratio of the maximum deflections of the beams A and B, will be

- (A) 2/3
- (B) 3/2
- (C) 5/8
- (D) 8/5

Answer: Option D

Question No. 24

A rod of uniform cross-section A and length L is deformed by δ , when subjected to a normal force P. The Young's Modulus E of the material, is

- (A) $E = P \cdot \delta / A \cdot L$
- (B) $E = A \cdot \delta / P \cdot L$
- (C) $E = P \cdot L / A \cdot \delta$
- (D) $E = P \cdot A / L \cdot \delta$

Answer: Option C

Question No. 25

In case of a simply supported I-section beam of span L and loaded with a central load W , the length of elasto-plastic zone of the plastic hinge, is

- (A) $L/2$
- (B) $L/3$
- (C) $L/4$
- (D) $L/5$

Answer: Option D

Question No. 26

The yield moment of a cross section is defined as the moment that will just produce the yield stress in

- (A) The outer most fibre of the section
- (B) The inner most fibre of the section
- (C) The neutral fibre of the section
- (D) The fibre everywhere

Answer: Option A

Question No. 27

If I_x and I_y are the moments of inertia of a section about X and Y axes, the polar moment of inertia of the section, is

- (A) $(I_x + I_y)/2$
- (B) $(I_x - I_y)/2$
- (C) $I_x + I_y$
- (D) (I_x/I_y)

Answer: Option C

Question No. 28

A simply supported beam carries varying load from zero at one end and w at the other end. If the length of the beam is a , the maximum bending moment will be

- (A) $wa/27$
- (B) $wa^2/27$
- (C) $w^2a/\sqrt{27}$
- (D) $wa^2/9\sqrt{3}$

Answer: Option D

Question No. 29


If E , N , K and $1/m$ are modulus of elasticity, modulus of rigidity, Bulk modulus and Poisson ratio of the material, the following relationship holds good

- (A) $E = 3K (1 - 2/m)$
- (B) $E = 2N (1 + 1/m)$
- (C) $(3/2)K (1 - 2/m) = N (1 + 1/m)$
- (D) All the above

Answer: Option D

Question No. 30

The forces acting on the bar as shown in the given figure introduce

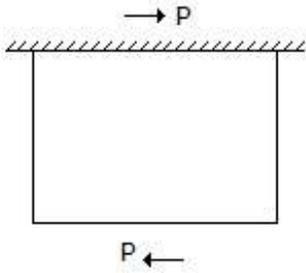

- (A) Compressive stress
- (B) Tensile stress
- (C) Shear stress
- (D) None of these

Answer: Option C

Question No. 31

Gradually applied static loads do not change with time their

- (A) Magnitude
- (B) Direction
- (C) Point of application
- (D) All the above

Answer: Option D

Question No. 32

The tangential component of stress on a plane inclined θ° to the direction of the force, may be obtained by multiplying the normal stress by

- (A) $\sin \theta$
- (B) $\cos \theta$
- (C) $\tan \theta$
- (D) $\sin^2 \theta$

Answer: Option D

Question No. 33

A body is said to be in equilibrium if

- (A) It moves horizontally
- (B) It moves vertically
- (C) It rotates about its C.G.
- (D) None of these

Answer: Option D

Question No. 34


Pick up the incorrect statement from the following: The torsional resistance of a shaft is directly proportional to

- (A) Modulus of rigidity

- (B) Angle of twist
 - (C) Reciprocal of the length of the shaft
 - (D) Moment of inertia of the shaft section
- Answer: Option D

Question No. 35

The forces acting normally on the cross section of a bar shown in the given figure introduce

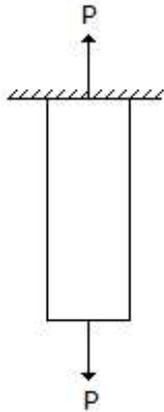

- (A) Compressive stress
 - (B) Tensile stress
 - (C) Shear stress
 - (D) None of these
- Answer: Option B

Question No. 36

The ratio of circumferential stress to the longitudinal stress in the walls of a cylindrical shell, due to flowing liquid, is

- (A) $\frac{1}{2}$
- (B) 1
- (C) $1\frac{1}{2}$
- (D) 2

Answer: Option D

Question No. 37

The load on a spring per unit deflection, is called

- (A) Stiffness
- (B) Proof resilience
- (C) Proof stress
- (D) Proof load

Answer: Option A

Question No. 38

A compound bar consists of two bars of equal length. Steel bar cross-section is 3500 mm^2 and that of brass bar is 3000 mm^2 . These are subjected to a compressive load $100,000 \text{ N}$. If $E_s = 0.2 \text{ MN/mm}^2$ and $E_b = 0.1 \text{ MN/mm}^2$, the stresses developed are:

- (A) $\sigma_b = 10 \text{ N/mm}^2, \sigma_s = 20 \text{ N/mm}^2$
- (B) $\sigma_b = 8 \text{ N/mm}^2, \sigma_s = 16 \text{ N/mm}^2$
- (C) $\sigma_b = 6 \text{ N/mm}^2, \sigma_s = 12 \text{ N/mm}^2$
- (D) $\sigma_b = 5 \text{ N/mm}^2, \sigma_s = 10 \text{ N/mm}^2$

Answer: Option A

Question No. 39


A close coil helical spring of mean diameter D consists of n coils of diameter d . If it carries an axial load W , the energy stored in the spring, is

- (A) $4WD^2n/d^4N$
- (B) $4W^2Dn/d^4N$
- (C) $4W^2D^3n/d^4N$
- (D) $4W^2D^3n^2/d^4N$

Answer: Option C

Question No. 40

The degree of indeterminacy of the frame in the given figure, is

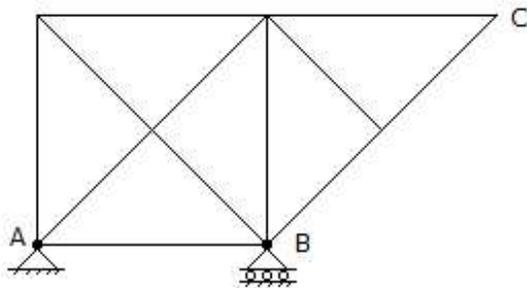

- (A) 1
- (B) 2
- (C) 3
- (D) Zero

Answer: Option C

Question No. 41

If normal stresses due to longitudinal and transverse loads on a bar are σ_1 and σ_2 respectively, the normal component of the stress on an inclined plane θ° to the longitudinal load, is

- (A) $\sigma_1 \sin \theta \times \sigma_2 \cos \theta$
- (B) $\sigma_1 \sin^2 \theta + \sigma_2 \cos^2 \theta$
- (C) $(\sigma_1 - \sigma_2) \sin 2\theta / 2$
- (D) $(\sigma_1 + \sigma_2) \sin 2\theta / 2$

Answer: Option B

Question No. 42

The moment of inertia of a triangular section (height h , base b) about its base, is

- (A) $bh^2/12$
- (B) $b^2h/12$
- (C) $bh^3/12$

(D) $b^3h/12$

Answer: Option C

Question No. 43

Shear centre of a half circular section of radius ' r ' and of constant thickness, lies at a distance of ' x ' from the centre where ' x ' is

- (A) r/π
- (B) $2r/\pi$
- (C) $3r/\pi$
- (D) $4r/\pi$

Answer: Option D

Question No. 44


The assumption in the theory of bending of beams is:

- (A) Material is homogeneous
- (B) Material is isotropic
- (C) Young's modulus is same in tension as well as in compression
- (D) All the above

Answer: Option D

Question No. 45

For determining the force in the member AB of the truss shown in the given figure by method of sections, the section is made to pass through AB , AD and ED and the moments are taken about

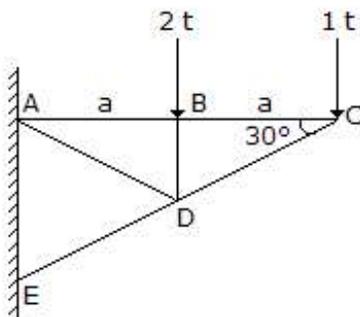

- (A) Joint C
- (B) Joint B
- (C) Joint D
- (D) Joint A

Answer: Option C

Question No. 46

A concentrated load P is supported by the free end of a quadrantal ring AB whose end B is fixed. The ratio of the vertical to horizontal deflections of the end A , is

- (A) π
- (B) $\pi/2$
- (C) $\pi/3$
- (D) $\pi/4$

Answer: Option B

Question No. 47

The ratio of crippling loads of a column having both the ends fixed to the column having both the ends hinged, is

- (A) 1
- (B) 2
- (C) 3
- (D) 4

Answer: Option D

Question No. 48

A load of 1960 N is raised at the end of a steel wire. The minimum diameter of the wire so that stress in the wire does not exceed 100 N/mm^2 is:

- (A) 4.0 mm
- (B) 4.5 mm
- (C) 5.0 mm
- (D) 5.5 mm

Answer: Option C

Question No. 49

The normal and tangential components of stress on an inclined plane through θ° to the direction of the force, will be equal if θ is

- (A) 45°
- (B) 30°
- (C) 60°
- (D) 90°

Answer: Option A

Question No. 50

The maximum deflection due to a uniformly distributed load w /unit length over entire span of a cantilever of length l and of flexural rigidity EI , is

- (A) $wl^3/3EI$
- (B) $wl^4/3EI$
- (C) $wl^4/8EI$
- (D) $wl^4/12EI$

Answer: Option C

Question No. 51


A compound truss may be formed by connecting two simple rigid frames, by

- (A) Two bars
- (B) Three bars
- (C) Three parallel bars
- (D) Three bars intersecting at a point

Answer: Option B

Question No. 52

The forces acting normally on the cross section of a bar shown in the given figure introduce

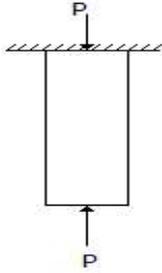

- (A) Compressive stress
- (B) Tensile stress
- (C) Shear stress
- (D) None of these

Answer: Option A

Question No. 53

A spring of mean radius 40 mm contains 8 active coils of steel ($N = 80000 \text{ N/mm}^2$), 4 mm in diameter. The clearance between the coils being 1 mm when unloaded, the minimum compressive load to remove the clearance, is

- (A) 25 N
- (B) 30 N
- (C) 35 N
- (D) 40 N

Answer: Option C

Question No. 54

If a solid shaft (diameter 20 cm, length 400 cm, $N = 0.8 \times 10^5 \text{ N/mm}^2$) when subjected to a twisting moment, produces maximum shear stress of 50 N/mm^2 , the angle of twist in radians, is

- (A) 0.001
- (B) 0.002
- (C) 0.0025
- (D) 0.003

Answer: Option C

Question No. 55


The strain energy stored in a spring when subjected to greatest load without being permanently distorted, is called

- (A) Stiffness
- (B) Proof resilience
- (C) Proof stress
- (D) Proof load

Answer: Option B

Question No. 56

To determine the force in BD of the truss shown in the given figure a section is passed through BD , CD and CE , and the moments are taken about

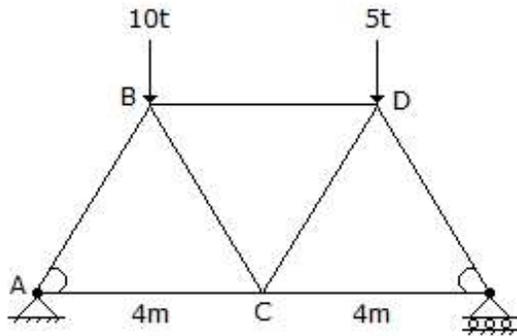

(A) A joint

(B) B joint

(C) C joint

(D) D joint

Answer: Option C

Question No. 57

The strain energy due to volumetric strain

(A) Is directly proportional to the volume

(B) Is directly proportional to the square of exerted pressure

(C) Is inversely proportional to Bulk modulus

(D) All the above

Answer: Option D

Question No. 58

A simply supported uniform rectangular bar breadth b , depth d and length L carries an isolated load W at its mid-span. The same bar experiences an extension e under same tensile load. The ratio of the maximum deflection to the elongation, is

(A) L/d

(B) $L/2d$

(C) $(L/2d)^2$

(D) $(L/3d)^2$

Answer: Option C

Question No. 59

A simply supported beam which carries a uniformly distributed load has two equal overhangs. To have maximum B.M. produced in the beam least possible, the ratio of the length of the overhang to the total length of the beam, is

(A) 0.207

(B) 0.307


(C) 0.407

(D) 0.508

Answer: Option A

Question No. 60

In the truss shown in given figure the force in member *DC* is

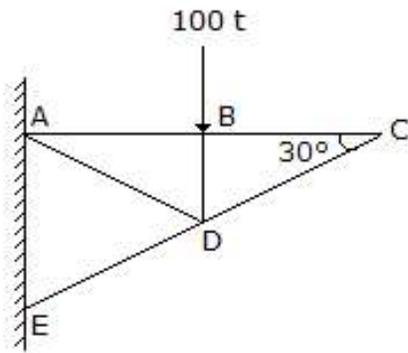

- (A) 100 t compressive
- (B) 100 t tensile
- (C) Zero
- (D) Indeterminate

Answer: Option C

Question No. 61

Pick up the correct statement from the following:

- (A) A wire wound in spiral form, is called a helical spring
- (B) The pitch of a close coil spring, is very small
- (C) The angle made by the coil with horizontal, is called the angle of helix
- (D) All the above

Answer: Option D

Question No. 62

The ratio of lateral strain to axial strain of a homogeneous material, is known

- (A) Yield ratio
- (B) Hooke's ratio
- (C) Poisson's ratio
- (D) Plastic ratio

Answer: Option C

Question No. 63


A short column (30 cm × 20 cm) carries a load P_1 at 4 cm on one side and another load P_2 at 8 cm on the other side along a principal section parallel to longer dimension. If the extreme intensity on either side is same, the ratio of P_1 to P_2 will be

- (A) 2/3
- (B) 3/2
- (C) 8/5
- (D) 5/8

Answer: Option C

Question No. 64

The force in BF of the truss shown in given figure, is

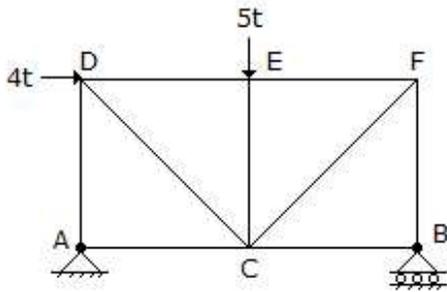

- (A) $4t$ tension
- (B) $4t$ compression
- (C) $4.5t$ tension
- (D) $4.5t$ compression

Answer: Option D

Question No. 65

For beams breadth is constant,

- (A) Depth $d \propto M$
- (B) Depth $d \propto \sqrt{M}$
- (C) Depth $d \propto 3 \sqrt{M}$
- (D) Depth $d \propto 1/M$

Answer: Option B

Question No. 66

The ratio of maximum shear stress to average shear stress of a circular beam, is

- (A) $2/3$
- (B) $3/2$
- (C) $3/4$
- (D) $4/3$

Answer: Option D

Question No. 67

For calculating the permissible stress $\sigma_0 = \sigma_y / [(1 + a(l/r)^2)]$ is the empirical formula, known as

- (A) Straight line formula
- (B) Parabolic formula
- (C) Perry's formula
- (D) Rankine's formula

Answer: Option D

Question No. 68

Pick up the correct statement from the following:

- (A) In a loaded beam, the moment at which the first yield occurs is called yield moment

- (B) In a loaded beam, the moment at which the entire section of the beam becomes fully plastic, is called plastic moment
- (C) In a fully plastic stage of the beam, the neutral axis divides the section in two sections of equal area
- (D) All the above

Answer: Option D

Question No. 69

For a strongest rectangular beam cut from a circular log, the ratio of the width and depth, is

- (A) 0.303
- (B) 0.404
- (C) 0.505
- (D) 0.707

Answer: Option D

Question No. 70

Pick up the correct statement from the following:

- (A) $M_{cg} = M \sqrt{M^2 + r^2}$ where letters carry their usual meanings
- (B) $T_{cp} = \sqrt{m^2 + T^2}$ where letters carry their usual meanings
- (C) The torque which when acting alone would produce maximum shear stress equal to the maximum shear stress caused by the combined bending and torsion, is called equivalent torque
- (D) All the above

Answer: Option D

Question No. 71

m_1 and m_2 are the members of two individual simple trusses of a compound truss. The compound truss will be rigid and determinate if

- (A) $m = m_1 + m_2$
- (B) $m = m_1 + m_2 + 1$
- (C) $m = m_1 + m_2 + 2$
- (D) $m = m_1 + m_2 + 3$

Answer: Option D

Question No. 72

The maximum B.M. due to an isolated load in a three hinged parabolic arch, (span l and rise h) having one of its hinges at the crown, occurs on either side of the crown at a distance

- (A) $l/4$
- (B) $h/4$
- (C) $l/2\sqrt{3}$
- (D) $l/3\sqrt{2}$

Answer: Option C

Question No. 73


The greatest load which a spring can carry without getting permanently distorted, is called

- (A) Stiffness
- (B) Proof resilience
- (C) Proof stress
- (D) Proof load

Answer: Option D

Question No. 74

The force in AC of the truss shown in the given figure, is

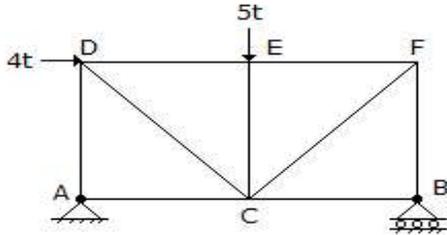

- (A) $5t$ tension
- (B) $4t$ tension
- (C) $4t$ compression
- (D) $5t$ compression

Answer: Option B

Question No. 75

A bar L metre long and having its area of cross-section A , is subjected to a gradually applied tensile load W . The strain energy stored in the bar is

- (A) $WL/2AE$
- (B) WL/AE
- (C) W^2L/AE
- (D) $W^2L/2AE$

Answer: Option D

Question No. 76

The maximum bending moment for a simply supported beam with a uniformly distributed load w /unit length, is

- (A) $wl/2$
- (B) $wl^2/4$
- (C) $wl^2/8$
- (D) $wl^2/12$

Answer: Option C

Question No. 77

An isolated load W is acting at a distance a from the left hand support, of a three hinged arch of span $2l$ and rise h hinged at the crown, the horizontal reaction at the support, is

- (A) Wa/h

(B) $Wa/2h$


(C) $2W/ha$

(D) $2h/Wa$

Answer: Option B

Question No. 78

The force in CD of the truss shown in given figure, is

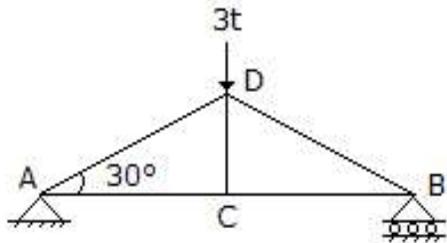

(A) $3t$ compression

(B) $3t$ tension

(C) Zero

(D) $1.5t$ compression

Answer: Option C

Question No. 79

At any point of a beam, the section modulus may be obtained by dividing the moment of inertia of the section by

(A) Depth of the section

(B) Depth of the neutral axis

(C) Maximum tensile stress at the section

(D) Maximum compressive stress at the section

Answer: Option B

Question No. 80

The ratio of the area of cross-section of a circular section to the area of its core, is

(A) 4

(B) 8

(C) 12

(D) 16

Answer: Option D

Question No. 81

The ratio of maximum and average shear stresses on a rectangular section, is

(A) 1

(B) 1.25


(C) 1.5

(D) 2.5

Answer: Option C

Question No. 82

In the truss shown in the given figure, the force in member BC is

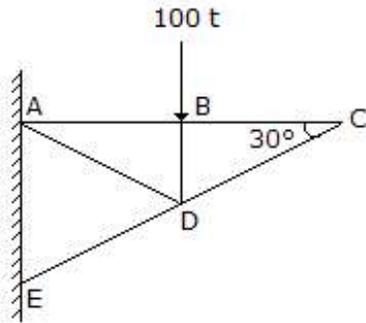

- (A) 100 t compressive
- (B) 100 t tensile
- (C) Zero
- (D) Indeterminate

Answer: Option C

Question No. 83

If a concrete column 200×200 mm in cross-section is reinforced with four steel bars of 1200 mm^2 total cross-sectional area. Calculate the safe load for the column if permissible stress in concrete is 5 N/mm^2 and E_s is $15 E_c$

- (A) 264 MN
- (B) 274 MN
- (C) 284 MN
- (D) 294 MN

Answer: Option C

Question No. 84

In plastic analysis, the shape factor for rectangular section, is

- (A) 1.4
- (B) 1.5
- (C) 1.6
- (D) 1.7

Answer: Option B

Question No. 85

A masonry dam (density = $20,000 \text{ N/m}^3$) 6 m high, one metre wide at the top and 4 m wide at the base, has vertical water face. The minimum stress at the base of the dam when the reservoir is full, will be

- (A) 75 N/m^2
- (B) 750 N/m^2
- (C) 7500 N/m^2
- (D) 75000 N/m^2

Answer: Option C

Question No. 86

A material is said to be perfectly elastic if

- (A) It regains its original shape on removal of the load
- (B) It regains its original shape partially on removal of the load
- (C) It does not regain its original shape at all
- (D) None of these

Answer: Option A

Question No. 87

A shaft rotating *N.R.M.* under a torque T , transmits a power

- (A) $T\pi N/30$ Newton metres/sec
- (B) $T\pi N/30$ Newton metres/min
- (C) $T\pi N/60$ Newton metres/min
- (D) $T\pi N/60$ Newton metres/sec

Answer: Option A

Question No. 88

If Q is load factor, S is shape factor and F is factor of safety in elastic design, the following:

- (A) $Q = S + F$
- (B) $Q = S - F$
- (C) $Q = F - S$
- (D) $Q = S \times F$

Answer: Option D

Question No. 89

The maximum deflection due to a load W at the free end of a cantilever of length L and having flexural rigidity EI , is

- (A) $WL^2/2EI$
- (B) $WL^2/3EI$
- (C) $WL^3/2EI$
- (D) $WL^3/3EI$

Answer: Option D

Question No. 90

Pick up the correct statement from the following:

- (A) For a uniformly distributed load, the shear force varies linearly
- (B) For a uniformly distributed load, B.M. curve is a parabola
- (C) For a load varying linearly, the shear force curve is a parabola
- (D) All the above

Answer: Option D

Question No. 91

The ratio of the length and depth of a simply supported rectangular beam which experiences maximum bending stress equal to tensile stress, due to same load at its mid span, is

- (A) $1/2$

(B) $2/3$

(C) $1/4$

(D) $1/3$

Answer: Option B

Question No. 92

A simply supported rolled steel joist 8 m long carries a uniformly distributed load over its span so that the maximum bending stress is 75 N/mm^2 . If the slope at the ends is 0.005 radian and the value of $E = 0.2 \times 10^6 \text{ N/mm}^2$, the depth of the joist, is

(A) 200 mm

(B) 250 mm


(C) 300 mm

(D) 400 mm

Answer: Option D

Question No. 93

The force in EC of the truss shown in the given figure, is

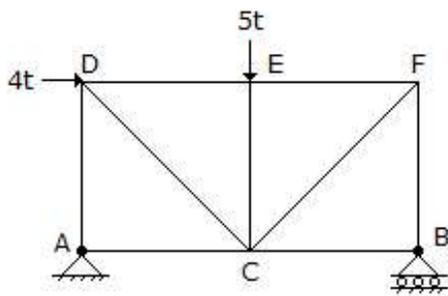

(A) Zero

(B) $5t$ tension

(C) $5t$ compression

(D) $4t$ tension

Answer: Option C

Question No. 94

The area of the core of a column of cross sectional area A , is

(A) $(1/3) A$

(B) $(1/6) A$

(C) $(1/12) A$

(D) $(1/18) A$

Answer: Option D

Question No. 95

If ' D ' and ' d ' are external and internal diameters of a circular shaft respectively, its polar moment of inertia, is

(A) $\pi/2 (D^4 - d^4)$

(B) $\pi/4 (D^4 - d^4)$


(C) $\pi/64 (D^4 - d^4)$

(D) $\pi/32 (D^4 - d^4)$

Answer: Option D

Question No. 96

The force in AD of the truss shown in given figure, is

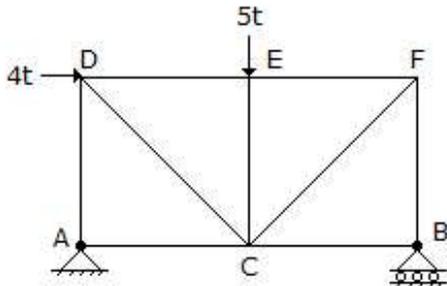

(A) $4.0t$ compression

(B) $3.0t$ compression

(C) $0.5t$ compression

(D) $0.5t$ tension

Answer: Option C

Question No. 97

The equivalent length of a column of length L , having one end fixed and other end hinged, is

(A) $2L$

(B) L

(C) $L/2$

(D) $L/\sqrt{2}$

Answer: Option D

Question No. 98

By applying the static equations *i.e.* $\Sigma H = 0$, $\Sigma V = 0$ and $\Sigma M = 0$, to a determinate structure, we may determine

(A) Supporting reactions only

(B) Shear forces only

(C) Bending moments only

(D) All the above

Answer: Option D

Question No. 99

A lift of weight W is lifted by a rope with an acceleration f . If the area of cross-section of the rope is A , the stress in the rope is

(A) $[W (1 + f/G)]/A$

(B) $(1 - g/f)/A$

(C) $[W (2 + f/G)]/A$

(D) $[W (2 + g/f)]/A$

Answer: Option A

Question No. 100

Co-efficient of wind resistance of a circular surface, is

- (A) 1/2
- (B) 1/3
- (C) 2/3
- (D) 3/2

Answer: Option C

Question No. 101


The equation of a parabolic arch of span 'l' and rise 'h', is given by

- (A) $y = h/l^2 \times (1 - x)$
- (B) $y = 2h/l^2 \times (1 - x)$
- (C) $y = 3h/l^2 \times (1 - x)$
- (D) $y = 4h/l^2 \times (1 - x)$

Answer: Option D

Question No. 102

A rectangular column shown in the given figure carries a load P having eccentricities e_x and e_y along X and Y axes. The stress at any point (x, y) is

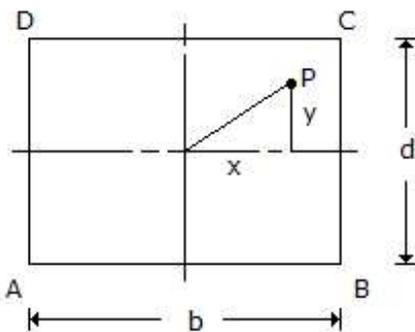

- (A) $(p/bd) [1 + (12e_y \cdot y/d^2) + (12e_x \cdot x/d^2)]$
- (B) $p [1 + (6e_y \cdot y/b) + (6e_x \cdot x/b)]$
- (C) $(p/bd) [1 + (6e_y \cdot y/d) + (6e_x \cdot x/b)]$
- (D) $(p/bd) [1 + (e_y \cdot y/d) + (e_x \cdot x/d)]$

Answer: Option A

Question No. 103

In case of principal axes of a section

- (A) Sum of moment of inertia is zero
- (B) Difference of moment inertia is zero
- (C) Product of moment of inertia is zero
- (D) None of these

Answer: Option C

Question No. 104

A simply supported beam carries a varying load from zero at one end and w at the other end. If the length of the beam is a , the shear force will be zero at a distance x from least loaded point where x is

- (A) $a/2$
- (B) $a/3$
- (C) $a/\sqrt{3}$
- (D) $a\sqrt{3}/2$

Answer: Option C

Question No. 105

The locus of the end point of the resultant of the normal and tangential components of the stress on an inclined plane, is

- (A) Circle
- (B) Parabola
- (C) Ellipse
- (D) Straight line

Answer: Option C

Question No. 106


The shape factor of standard rolled beam section varies from

- (A) 1.10 to 1.20
- (B) 1.20 to 1.30
- (C) 1.30 to 1.40
- (D) 1.40 to 1.50

Answer: Option A

Question No. 107

In the cable shown in the given figure, the minimum tension occurs at

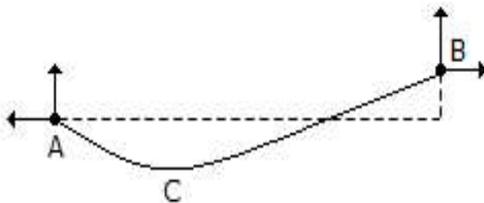

- (A) A
- (B) B
- (C) C
- (D) Between A and C

Answer: Option C

Question No. 108

Principal planes are subjected to

- (A) Normal stresses only
- (B) Tangential stresses only

(C) Normal stresses as well as tangential stresses

(D) None of these

Answer: Option A

Question No. 109

A_b and A_c are the cross sections of bronze and copper bars of equal length, σ_b , σ_c are their respective stresses due to load P . If P_b and P_c are the loads shared by them, (where E_b and E_c are their moduli).

(A) $\sigma_b/\sigma_c = E_b/E_c$

(B) $P = P_b + P_c$

(C) $P = A_b \sigma_b + A_c \sigma_b$

(D) All the above

Answer: Option D

Question No. 110

A rolled steel joist is simply supported at its ends and carries a uniformly distributed load which causes a maximum deflection of 10 mm and slope at the ends of 0.002 radian. The length of the joist will be,

(A) 10 m

(B) 12 m

(C) 14 m

(D) 16 m

Answer: Option D

Question No. 111

If the strain energy stored per unit volume in a hollow shaft subjected to a pure torque when t attains maximum shear stress f_s the ratio of inner diameter to outer diameter, is $17/64$ (f_s/N)

(A) $1/2$

(B) $1/3$

(C) $1/4$

(D) $1/5$

Answer: Option C

Question No. 112

If ΣH and ΣV are the algebraic sums of the forces resolved horizontally and vertically respectively, and ΣM is the algebraic sum of the moments of forces about any point, for the equilibrium of the body acted upon

(A) $\Sigma H = 0$

(B) $\Sigma V = 0$

(C) $\Sigma M = 0$

(D) All the above

Answer: Option D

Question No. 113

The eccentricity (e) of a hollow circular column, external diameter 25 cm, internal diameter 15 cm for an eccentric load 100 t for non-development of tension, is

- (A) 2.75 cm
- (B) 3.00 cm
- (C) 3.50 cm
- (D) 4.25 cm

Answer: Option D

Question No. 114


A steel rod of sectional area 250 sq. mm connects two parallel walls 5 m apart. The nuts at the ends were tightened when the rod was heated to 100°C. If $\alpha_{steel} = 0.000012/C^\circ$, $E_{steel} = 0.2$ MN/mm², the tensile force developed at a temperature of 50°C, is

- (A) 80 N/mm²
- (B) 100 N/mm²
- (C) 120 N/mm²
- (D) 150 N/mm²

Answer: Option C

Question No. 115

In the truss shown in given figure, the force in member BD is

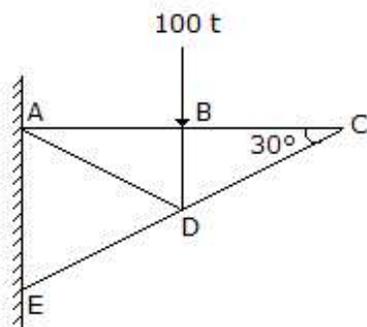

- (A) 100 t compressive
- (B) 100 t tensile
- (C) Zero
- (D) Indeterminate

Answer: Option A

Question No. 116

$P = \pi^2 EI/4L^2$ is the equation of Euler's crippling load, if

- (A) Both the ends are fixed
- (B) Both the ends are hinged
- (C) One end is fixed and other end is free
- (D) One end is fixed and other end is hinged

Answer: Option C

Question No. 117

The moment of inertia of a circular section about any diameter D , is

- (A) $\pi D^2/64$
- (B) $\pi D^4/32$
- (C) $\pi D^3/64$
- (D) $\pi D^4/64$

Answer: Option D

Question No. 118

The S.F. diagram of a loaded beam shown in the given figure is that of



- (A) A simply supported beam with isolated central load
- (B) A simply supported beam with uniformly distributed load
- (C) A cantilever with an isolated load at the free end
- (D) A cantilever with a uniformly distributed load

Answer: Option D

Question No. 119

If M , I , R , E , F , and Y are the bending moment, moment of inertia, radius of curvature, modulus of elasticity stress and the depth of the neutral axis at section, then

- (A) $M/I = R/E = F/Y$
- (B) $I/M = R/E = F/Y$
- (C) $M/I = E/R = E/Y$
- (D) $M/I = E/R = Y/F$

Answer: Option C

Question No. 120

Shear strain energy theory for the failure of a material at elastic limit, is due to

- (A) Rankine
- (B) Guest or Tresca
- (C) St. Venant
- (D) Von Mises

Answer: Option D

Question No. 121

If the normal stresses due to longitudinal and transverse loads on a bar are σ_1 and σ_2 respectively, the tangential component of the stress on an inclined plane through θ° , the longitudinal load is

- (A) $\sigma_1 \sin\theta + \sigma_2 \cos\theta$
- (B) $\sigma_1 \sin^2\theta + \sigma_2 \cos^2\theta$
- (C) $(\sigma_1 - \sigma_2) \sin 2\theta/2$

(D) $(\sigma_1 + \sigma_2) \sin 2\theta/2$

Answer: Option C

Question No. 122

The radius of gyration of a section of area A and least moment of inertia I about the centroidal axis, is

(A) A/I

(B) I/A

(C) $\sqrt{I/A}$

(D) $\sqrt{A/I}$

Answer: Option C

Question No. 123

The locus of the moment of inertia about inclined axes to the principal axis, is

(A) Straight line

(B) Parabola

(C) Circle

(D) Ellipse

Answer: Option D

Question No. 124

Beams composed of more than one material, rigidly connected together so as to behave as one piece, are known as

(A) Compound beams

(B) Indeterminate beams

(C) Determinate beams

(D) Composite beams

Answer: Option D

Question No. 125

A steel plate $d \times b$ is sandwiched rigidly between two timber joists each $D \times B/2$ in section. The moment of resistance of the beam for the same maximum permissible stress ' σ ' in timber and steel will be (where Young's modulus of steel is m times that of the timber).

(A) $\sigma [(BD^2 + mbd^2)/6D]$

(B) $\sigma [(BD^3 + mbd^3)/6D]$

(C) $\sigma [(BD^2 + mbd^3)/4D]$

(D) $\sigma [(BD^2 + mbd^2)/4D]$

Answer: Option B

Question No. 126

The general expression for the B.M. of a beam of length l is the beam carries $M = (wl/2) x - (wx^2/2)$

(A) A uniformly distributed load w /unit length

(B) A load varying linearly from zero at one end to w at the other end

(C) An isolated load at mid span

(D) None of these

Answer: Option A

Question No. 127


In a shaft, the shear stress is not directly proportional to

- (A) Radius of the shaft
- (B) Angle of twist
- (C) Length of the shaft
- (D) Modulus of rigidity

Answer: Option C

Question No. 128

In the truss, the force in the member AC is

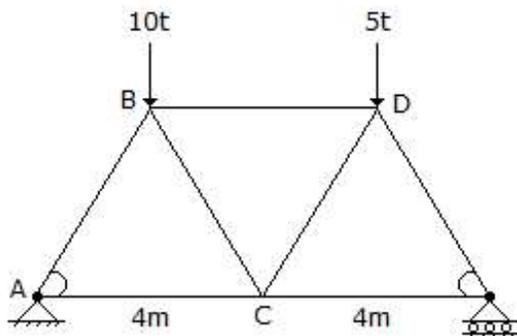

- (A) 6.25 t compressive
- (B) 8.75 t tensile
- (C) $(8.75/\sqrt{3})$ t tensile
- (D) $(8.75/\sqrt{3})$ t compressive

Answer: Option D

Question No. 129

The maximum deflection of a simply supported beam of span L , carrying an isolated load at the centre of the span; flexural rigidity being EI , is

- (A) $WL^3/3EI$
- (B) $WL^3/8EI$
- (C) $WL^3/24EI$
- (D) $WL^3/48EI$

Answer: Option D

Question No. 130

The point of contraflexure is the point where

- (A) B.M. changes sign
- (B) B.M. is maximum
- (C) B.M. is minimum
- (D) S.F. is zero

Answer: Option A

Question No. 131

A steel bar 20 mm in diameter simply-supported at its ends over a total span of 40 cm carries a load at its centre. If the maximum stress induced in the bar is limited to N/mm^2 , the bending strain energy stored in the bar, is

- (A) 411 N mm
- (B) 511 N mm
- (C) 611 N mm
- (D) 711 N mm

Answer: Option C

Question No. 132

Keeping the depth d constant, the width of a cantilever of length l of uniform strength loaded with a uniformly distributed load w varies from zero at the free end and

- (A) $(2w/\sigma d^2) \times l^2$ at the fixed end
- (B) $(3w/\sigma d) \times l^2$ at the fixed end
- (C) $(3w/\sigma d^2) \times l^2$ at the fixed end
- (D) $(5w/\sigma d) \times l^2$ at the fixed end

Answer: Option C

Question No. 133

The equivalent length is of a column of length ' L ' having both the ends fixed, is

- (A) $2L$
- (B) L
- (C) $L/2$
- (D) $L/\sqrt{2}$

Answer: Option C

Question No. 134

For calculating the allowable stress of long columns. The empirical formula $\sigma_0 = (\sigma_y/n) (1 - a l/r)$, is known as

- (A) Straight line formula
- (B) Parabolic formula
- (C) Perry's formula
- (D) Rankine's formula

Answer: Option A

Question No. 135

The equivalent length of a column of length L having one end fixed and the other end free, is

- (A) $2L$
- (B) L
- (C) $L/2$
- (D) $L/\sqrt{2}$

Answer: Option A

Question No. 136

For determining the support reactions at *A* and *B* of a three hinged arch, points *B* and *C* are joined and produced to intersect the load line at *D* and a line parallel to the load line through *A* at *D'*. Distances *AD*, *DD'* and *AD'* when measured were 4 cm, 3 cm and 5 cm respectively. The angle between the reactions at *A* and *B* is

- (A) 30°
- (B) 45°
- (C) 60°
- (D) 90°

Answer: Option D

Question No. 137

The deflection of a uniform circular bar of diameter *d* and length '*l*', which extends by an amount '*e*' under a tensile pull '*W*', when it carries the same load at its mid-span, is

- (A) $el/2d$
- (B) $e^2l/3d^2$
- (C) $el^2/3d^2$
- (D) $e^2l^2/3d^2$

Answer: Option C

Question No. 138

The ratio of the maximum deflections of a simply supported beam with a central load *W* and of a cantilever of same length and with a load *W* at its free end, is

- (A) 1/8
- (B) 1/10
- (C) 1/12
- (D) 1/16

Answer: Option D

Question No. 139

The radius of gyration of a rectangular section (depth *D*, width *B*) from a centroidal axis parallel to the width is

- (A) $D/2$
- (B) $D/\sqrt{3}$
- (C) $D/2\sqrt{3}$
- (D) $D/4\sqrt{3}$

Answer: Option C

Question No. 140

A square column carries a load *P* at the centroid of one of the quarters of the square. If *a* is the side of the main square, the combined bending stress will be

- (A) p/a^2
- (B) $2p/a^2$
- (C) $3p/a^2$
- (D) $4p/a^2$

Answer: Option C

Question No. 141

The moment of inertia of a rectangular section of width 'B' and depth 'D' about an axis passing through C.G. and parallel to its width is

- (A) $BD^2/6$
- (B) $BD^3/6$
- (C) $BD^3/12$
- (D) $B^2D/6$

Answer: Option C

Question No. 142

The normal component of a force inclined through θ° is obtained by multiplying the force by

- (A) $\sin \theta$
- (B) $\cos \theta$
- (C) $\tan \theta$
- (D) $\sin \theta \cdot \cos \theta$

Answer: Option D

Question No. 143

The ratio of the section modulus of a square section of side B and that of a circular section of diameter D, is

- (A) $2\pi/15$
- (B) $3\pi/16$
- (C) $3\pi/8$
- (D) $\pi/16$

Answer: Option B

Question No. 144

A material may fail if

- (A) Maximum principal stress exceeds the direct stress σ_0
- (B) Maximum strain exceeds σ_0/E
- (C) Maximum shear stress exceeds $\sigma_0/2$
- (D) All the above

Answer: Option D

Question No. 145

The ratio of tangential and normal components of a stress on an inclined plane through θ° to the direction of the force is:

- (A) $\sin \theta$
- (B) $\cos \theta$
- (C) $\tan \theta$
- (D) $\cos \theta$

Answer: Option C

Question No. 146

A shaft is subjected to bending moment M and a torque T simultaneously. The ratio of the maximum bending stress to maximum shear stress developed in the shaft, is

- (A) M/T
- (B) T/M
- (C) $2M/T$
- (D) $2T/M$

Answer: Option C

Question No. 147

The maximum height of a masonry dam of a triangular section whose base width is b and specific gravity s , is

- (A) $b \sqrt{s}$
- (B) $b.s$
- (C) \sqrt{bs}
- (D) $s \sqrt{b}$

Answer: Option A

Question No. 148

A bar of square section of area a^2 is held such that its one of its diagonals is vertical. The maximum shear stress will develop at a depth h where h is

- (A) $2\sqrt{3}/4$
- (B) $3\sqrt{2}/4$
- (C) $2/\sqrt{3}$
- (D) $\sqrt{3}/4$

Answer: Option B

Question No. 149

A cantilever of length 2 cm and depth 10 cm tapers in plan from a width 24 cm to zero at its free end. If the modulus of elasticity of the material is $0.2 \times 10^6 \text{ N/mm}^2$, the deflection of the free end, is

- (A) 2 mm
- (B) 3 mm
- (C) 4 mm
- (D) 5 mm

Answer: Option D

Question No. 150

The locus of reaction of a two hinged semi-circular arch, is

- (A) Straight line
- (B) Parabola
- (C) Circle
- (D) Hyperbola

Answer: Option A

Question No. 151

A material which obeys Hook's law is subjected to direct stress σ_0 . At its elastic limit, the following statement is true,

- (A) Strain is equal to σ_0/E
- (B) Maximum shear stress = $\sigma_0/2$
- (C) Strain energy = $\sigma_0^2/2E \times \text{volume}$
- (D) All the above

Answer: Option D

Question No. 152

A truss containing j joints and m members, will be a simple truss if

- (A) $m = 2j - 3$
- (B) $j = 2m - 3$
- (C) $m = 3j - 2$
- (D) $j = 3m - 2$

Answer: Option A

Question No. 153

In plastic analysis, the shape factor for a triangular section, is

- (A) 1.5
- (B) 1.34
- (C) 2.34
- (D) 2.5

Answer: Option C

Question No. 154

A three hinged arch is generally hinged at its supports and

- (A) At one quarter span
- (B) At the crown
- (C) Anywhere in the rib
- (D) None of these

Answer: Option C

Question No. 155

A steel bar 5 m \times 50 mm is loaded with 250,000 N. If the modulus of elasticity of the material is 0.2 MN/mm² and Poisson's ratio is 0.25, the change in the volume of the bar is:

- (A) 1.125 cm³
- (B) 2.125 cm³
- (C) 3.125 cm³
- (D) 4.125 cm²

Answer: Option C

Question No. 156

Stress may be defined as

- (A) Force per unit length

- (B) Force per unit volume
- (C) Force per unit area
- (D) None of these

Answer: Option C

Question No. 157

A steel rod 1 metre long having square cross section is pulled under a tensile load of 8 tonnes. The extension in the rod was 1 mm only. If $E_{steel} = 2 \times 10^6 \text{ kg/cm}^2$, the side of the rod, is

- (A) 1 cm
- (B) 1.5 cm
- (C) 2 cm
- (D) 2.5 cm

Answer: Option C

Question No. 158

The equivalent length of a column of length L , having both the ends hinged, is

- (A) $2L$
- (B) L
- (C) $L/2$
- (D) $L/\sqrt{2}$

Answer: Option B

Question No. 159

Pick up the correct statement from the following:

- (A) The bending stress in a section is zero at its neutral axis and maximum at the outer fibres
- (B) The shear stress is zero at the outer fibres and maximum at the neutral axis
- (C) The bending stress at the outer fibres, is known as principal stress
- (D) All the above

Answer: Option D

Question No. 160

Total strain energy theory for the failure of a material at elastic limit, is known

- (A) Guest's or Tresca's theory
- (B) St. Venant's theory
- (C) Rankine's theory
- (D) Haig's theory

Answer: Option D

Question No. 161

There are two hinged semicircular arches A , B and C of radii 5 m, 7.5 m and 10 m respectively and each carries a concentrated load W at their crowns. The horizontal thrust at their supports will be in the ratio of

- (A) $1 : 1\frac{1}{2} : 2$
- (B) $2 : 1\frac{1}{2} : 1$
- (C) $1 : 1 : 2$

(D) None of these

Answer: Option C

Question No. 162

The horizontal deflection of a parabolic curved beam of span 10 m and rise 3 m when loaded with a uniformly distributed load l t per horizontal length is (where I_c is the M.I. at the crown, which varies as the slope of the arch).

(A) $50/EI_c$

(B) $100/EI_c$

(C) $150/EI_c$

(D) $200/EI_c$

Answer: Option D

Question No. 163

For beams of uniform strength, if depth is constant,

(A) Width $b \propto M$

(B) Width $b \propto \sqrt{M}$

(C) Width $b \propto 3\sqrt{M}$

(D) Width $b \propto 1/M$

Answer: Option A

Question No. 164

Stress may be expressed in Newtons

(A) Per millimetre square (N/mm^2)

(B) Per centimetre square (N/cm^2)

(C) Per metre square (N/m^2)

(D) None of these

Answer: Option A

Question No. 165

The maximum magnitude of shear stress due to shear force F on a rectangular section of area A at the neutral axis, is

(A) F/A

(B) $F/2A$

(C) $3F/2A$

(D) $2F/3A$

Answer: Option C

Question No. 166

The vertical reaction for the arch is

(A) $wa/2l$

(B) wl/a

(C) wa/l

(D) $wa^2/2l$

Answer: Option A

Question No. 167

Flat spiral springs

- (A) Consist of uniform thin strips
- (B) Are supported at outer end
- (C) Are wound by applying a torque
- (D) All the above

Answer: Option D

Question No. 168

In plastic analysis, the shape factor for a circular section, is

- (A) 1.5
- (B) 1.6
- (C) 1.7
- (D) 1.75

Answer: Option C

Question No. 169

In case of a simply supported rectangular beam of span L and loaded with a central load W , the length of elasto-plastic zone of the plastic hinge, is

- (A) $L/2$
- (B) $L/3$
- (C) $L/4$
- (D) $L/5$

Answer: Option B

Question No. 170

Pick up the correct statement from the following:

- (A) Hoop strain of the walls of a cylinder due to liquid is $(pd/2tE) (1 - 1/2m)$
- (B) Longitudinal strain in the walls of a cylinder due to liquid is $(pd/2tE) (1/2 - 1/m)$
- (C) Volumetric change in the cylinder due to liquid is $(pd/2tE) (5/2 - 2/m)$
- (D) All the above

Answer: Option D

Question No. 171

The stiffness of the close coil helical spring is

- (A) $d^4N/8D^3n$
- (B) $d^4N/4D^3n$
- (C) $4D^3N/d^4n$
- (D) $8D^3N/d^4n$

Answer: Option A

Question No. 172

The ratio of the deflections of the free end of a cantilever due to an isolated load at 1/3rd and 2/3rd of the span, is

- (A) 1/7

(B) $2/7$

(C) $3/7$

(D) $2/5$

Answer: Option B

Question No. 173

The ratio of the length and diameter of a simply supported uniform circular beam which experiences maximum bending stress equal to tensile stress due to same load at its mid span, is

(A) $1/8$

(B) $1/4$

(C) $1/2$

(D) $1/3$

Answer: Option C

Question No. 174

The ratio of moments of inertia of a triangular section about its base and about a centroidal axis parallel to its base, is

(A) 1.0

(B) 1.5

(C) 2.0

(D) 3.0

Answer: Option D

Question No. 175

The ratio of shear stress and shear strain of an elastic material, is

(A) Modulus of Rigidity

(B) Shear Modulus

(C) Modulus of Elasticity

(D) Both (a) and (b)

Answer: Option D

Question No. 176

For permissible shear stress f_s , the torque transmitted by a thin tube of mean diameter D and wall thickness t , is

(A) $(\pi D^2/2) t f_s$

(B) $(\pi D/2) t f_s$

(C) $\pi D^2 t f_s$

(D) $(\pi D^2 t^2/4) f_s$

Answer: Option A

Question No. 177

At yield point of a test piece, the material

(A) Obeys Hooke's law

(B) Behaves in an elastic manner

(C) Regains its original shape on removal of the load

(D) Undergoes plastic deformation

Answer: Option D

Question No. 178

For the close coil helical spring of the maximum deflection is

(A) WD^3n/d^4N

(B) $2WD^3n/d^4N$

(C) $4W^2D^3n/d^4N$

(D) $8WD^3n/d^4N$

Answer: Option D